




### Features

- Socket with PCB connections
- For relay series SGR282 ZK
- With plastic retaining bracket
- Central fastening with M3 screw



### Dimensions

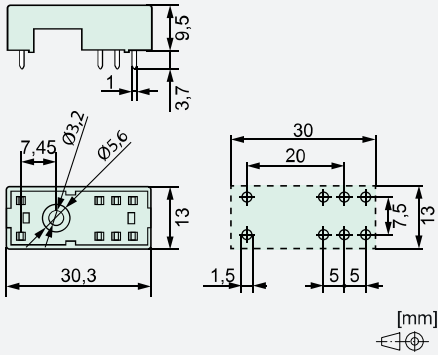


### Technical data

Limit continuous current*	8 A
Rated voltage	300 VAC

\*max. note max. contact load in the relay data sheet

### Circuit diagram



### Insulation data

Basic insulation	at 250 VAC
--- Air and creepage distance	>4 mm
Test voltage	4 000 V <sub>rms</sub> / 1 min
Creepage resistance	CTI 250
Pollution degree	2
Overvoltage category	III

### Additional data

Weight	approx. 4 g
Ambient temperature	-40°C ... +70°C

### Tests, regulations, standards

Approvals	cULus
UL File	E113714
Insulation group according to IEC 60664-1	250 VAC
Standards	IEC 61810-1, UL 508

### Options, Accessories

none available

### Mounting instructions

Mounting	on PCB
Mounting	with central fastening Screw M3
- Torque	max. 1,28 Nm

### Product key

	SRP	SGR2
Socket type		
Relay series		